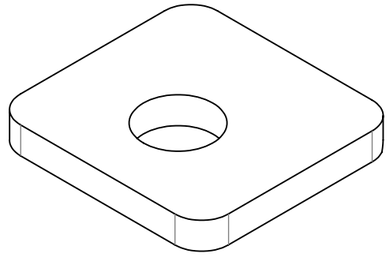

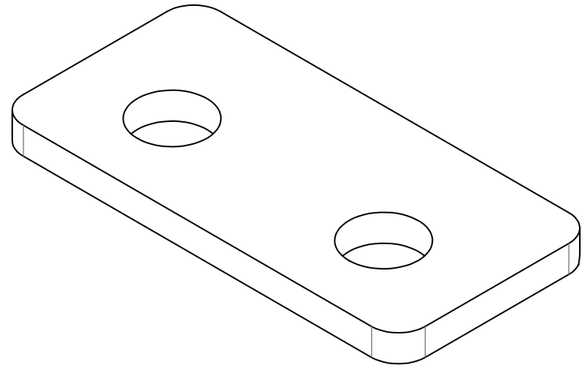

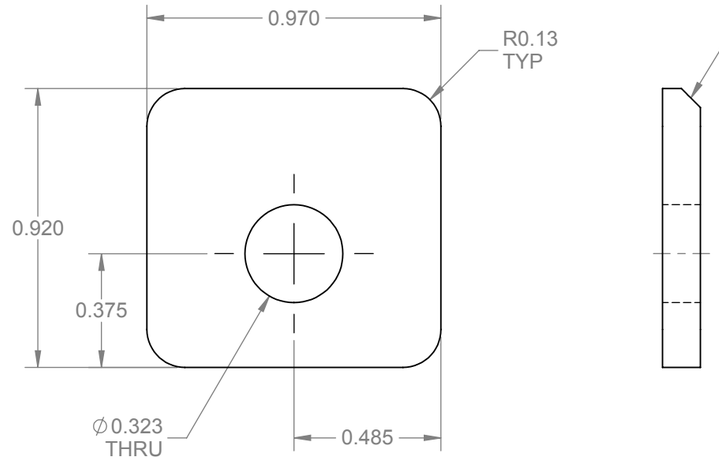



D5084-1 RADIUS BLOCK

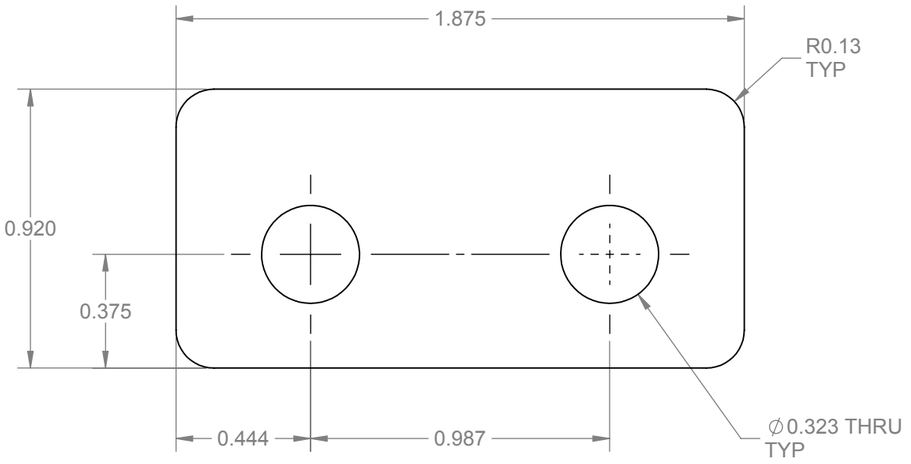



D5084-3 RADIUS BLOCK

NOTES:
1) MATERIAL: 6061-T6 ALUMINUM SHEET, 0.125 THICK
PER QQ-A-250/11 OR AMS 4025 OR AMS 4027 OR ASTM B209
REF DART SPEC. M6061T6S.125
2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
4) UNITS: INCHES UNLESS OTHERWISE NOTED
5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
6) IDENTIFICATION: IDENTIFY WITH DART P/N "D5084-X" AND B/N PER PER QSI 044 METHOD 6.7
7) WEIGHT -1: 0.01 lbs
-3: 0.02 lbs

PRELIMINARY ISSUE

REV.	DESCRIPTION	BY	DATE
A	PRELIMINARY	AJS	14.03.20

DESIGN	AJS	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	AJS		
CHECKED	AP	DRAWING NO.	REV. A2
MFG. APPR.	DD	D5084	SHEET 1 OF 1
APPROVED		TITLE	SCALE
DE APPR.		RADIUS BLOCK	NTS
DATE	14.03.20		

COPYRIGHT © 2014 BY DART AEROSPACE LTD
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.